GENERAL NOTES:

1. SEE SHEET EX6.04 AND EX6.05 FOR PLATFORM DETAILS.

2. SEE ELEVATION SHEETS EX3.11 AND EX3.16 FOR REFERENCE AND FURTHER CLARIFICATION.

3. SEE SHEET EX1.04 FOR ADDITIONAL DETAILS OF WALL PARTITION TYPES.

4. SEE PHOTOS OF EXISTING TREE AND ROLL-UP LOADING DOCK DOOR FOR FURTHER CLARIFICATION.

ADDENDUM NOTES:

1. PROVIDE NEW ±14'-0"H (VIF) WALL PARTITION TYPE 'C' TO CONCEAL ROLL-UP LOADING DOCK DOOR AND TO PROVIDE ADDITIONAL SUPPORT FOR FAUX TREE. ATTACH NEW PLATFORM TYPE #7 TO NEW WALL PARTITION AS REQ'D.

2. REPLACE GRAPHIC P2-24 WITH NEW G1 GRAPHIC, ADHERED TO NEW ±14'-0"H (VIF) WALL PARTITION WITH VHB TAPE AS REQ'D.

3. RELOCATE EXISTING FAUX TREE ONTO NEW PLATFORM TYPE #7. TIE-BACK TREE INTO NEW WALL PARTITION TYPE 'C' AND NEW PLATFORM TYPE #7 AS REQ'D FOR ADDITIONAL SUPPORT. IF NECESSARY, PROVIDE AIRCRAFT CABLE TIED BACK TO CEILING FOR ADDITIONAL SUPPORT.

IMAGE #1: EXISTING EXHIBIT ELEMENTS IN FRONT OF ROLL-UP LOADING DOCK DOOR

IMAGE #2: EXISTING FAUX TREE — FRONT ELEVATION

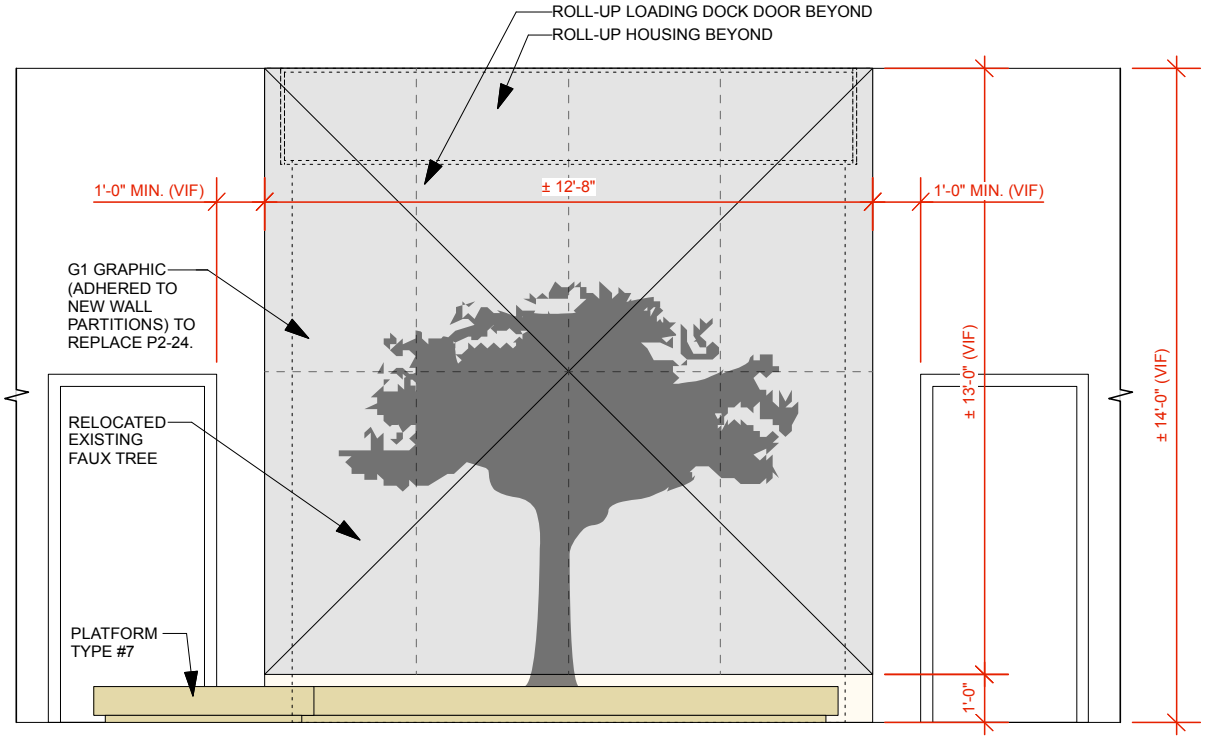

1 ELEVATION: RELOCATED EXISTING FAUX TREE
SCALE: 1/4" = 1'-0"

SK 0.02

ELEV: RELOCATED TREE
ROANOKE ISLAND FESTIVAL PARK
Wayfinding, Visitor Center & Museum Improvements

SC: 1/4" = 1'-0"
DATE: 18 JAN 2013

riggs ward℠
2315 W. MAIN STREET • RICHMOND, VA 23220
TEL 804-254-1740 • FAX 804-254-1742